

## HOW TO USE SWING CAR

1. The Swing Car is designed to accommodate anyone from a 3 year old child to an average size adult, and is manufactured for hours upon hours of smooth gliding.
2. Sit on top of the Swing Car with both feet placed on footrest and both hands on steering wheel
3. Turn the wheel back and forth continuously, and the Swing Car's unique design will use gravity and centrifugal force to glide forward on its own. To stop, simply stop turning the steering wheel, wait for the car to slow down, and place the feet on ground.
4. To move faster, lean slightly forward over the steering wheel and use your whole upper body when you turn the steering wheel. (Not just Arms)
5. The maximum speed on smooth level ground should be approximately 6 miles per hour. (Although normal operation yields speeds of 3-4 miles per hour).
6. The maximum weight of pilot of Swing Car should not exceed to 276 Lbs (125kgs)

## WHERE TO USE SWING CAR

1. The Swing Car works best when used on smooth, flat surfaces such as interior wooden, tiled or linoleum covered floors or exterior concrete, paved paths, asphalt and other open areas.
2. Ideal for use in any area with a smooth, flat surface and plenty of room to operate.

## WHAT SWING CAR IS MADE OF

1. The Swing Car's parts include PP, Nylon and stainless steel fittings for the wheels and other moving pads.
2. The Swing Car requires no batteries or power sources of any kind, except the rider.

## SAFETY INSTRUCTIONS

Despite the Swing Car's durability and safety standard-approved design, make sure you always remember:

- All children Pilots, especially those under the age of 5, should be supervised by an adult whenever the Swing Car is operated.
- The Swing Car should not be used on any public street or near to any kind of traffic, or anywhere nearby to cars, buses, motor bikes or any other vehicles.
- The Swing Car should not be used near pools, steps or other drop offs.
- The Swing Car should not be ridden or raced on steep sleeves or on uneven or rough surfaces.
- The Swing Car pilot should always sit on seating area facing forward.
- The pilot should sit close to the steering wheel, rather the back of the Swing Car, to maximise control and remove any possible risks of falling or tipping backwards.
- Failure to observe the above the warnings or to use the Swing Car in any way other than that intended, could cause serious injury or death.

### **SAFETY WARNINGS: PLEASE READ BEFORE USING PRODUCT**

- **Always** supervise your children when they are playing with this toy.
- Never allow your child to climb or stand on this product.
- To ensure the item is safe to play with please inspect the pieces before each use and discontinue use if any pieces are broken or cracked in any manner. Please dispose of that piece in an appropriate manner.


Designed & Marketed By: **R FOR RABBIT BABY PRODUCTS PVT. LTD.**

Add: 708, 7th Floor, Pinnacle Business Park, Corporate Road, Prahlad Nagar, Ahmedabad, Gujarat 380015

C: +91-79-410-57595 | W: [www.rforrabbit.com](http://www.rforrabbit.com) | E: [customercare@rforrabbit.com](mailto:customercare@rforrabbit.com)

Manufactured By: **PLAYPIPERS INDUSTRIES LLP**

Sai Estate, Plot no 2 & 3, Survey no 139 & 140, Village: Vasna Chancharwadi, Taluka: Sanand, Ahmedabad, Gujarat, 382213

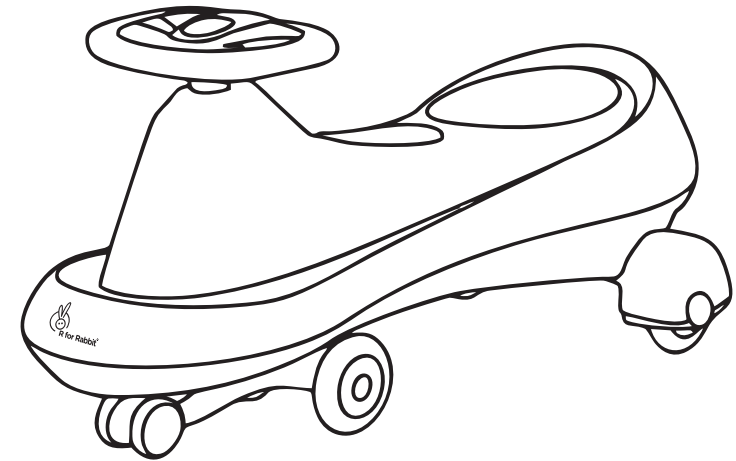

\*Picture shown is for illustrative purpose only.  
Actual product may vary from image.

# IYA IYA DRIFT

Smooth Ride Swing Car for Kids

## Instruction Manual



**Age Group**  
**3+ Years**




**Weight Capacity**  
**125 Kgs**

IS 15644



CM/L-7200209504

## Read and follow below instruction to assemble Swing Car

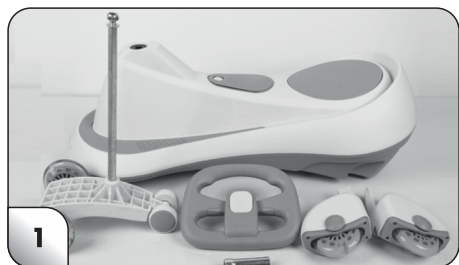


1

Check whether the accessories are completely.



2

When installing the rear wheel, pay attention to distinguish the left and right, R right L left.

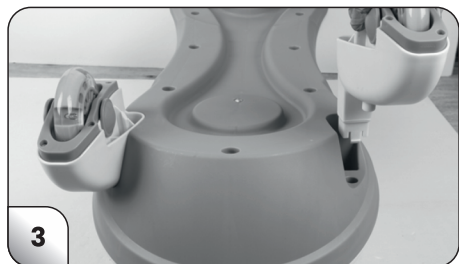

3

Align the hole of the rear wheel and press firmly, and the rear wheel is locked in place.



4

Loosen and remove the front wheel support rods & screws & washers.



5

Insert the front wheel to the end, and the front wheel bearing is fully locked into the car body.



6

Straighten the front wheel and insert the steering.



7

Insert the metal washer, and then screw on the screw.



8

Insert the installation tool and tighten it to the right with a screwdriver.



9

Cover the steering cap.



10

The installation is complete.

Note: When using, you should always check whether the various parts are firm to avoid severe impact; avoid storing in the cold and the sun to prevent aging and fading