



Instruction Manual

Model: Rock N Roll Stroller



R FOR RABBIT BABY PRODUCTS PVT. LTD.
A1-305, Palladium, Corporate Road, Makarba,
Ahmedabad, Gujarat - 380015
+91-79-410-57595 | www.rforrabbit.com
customercare@rforrabbit.com




WARNING:


Before using this product, please read the instruction manual thoroughly,

- Manual will help you in correct operation & installation procedure, in order to avoid incorrect operation and damage. This specification shall be kept and placed in a proper place.
- The assembly and adjustment of the product must be carried out by the adult only. Make sure that all the locking devices are working properly.
- Safety belt must be used properly for children while riding.
- Placing any load on the handle will affect the stability of the vehicle.
- Don't Leave child unattended while in use.
- Please keep off the Plastic Bags and other packaging materials away from the children! Danger of suffocation!
- Do not use the product in traffic area.
- The maximum load carrying capacity of the stroller is 15kg, and it should not be overloaded.
- The car basket maximum load-bearing capacity of 2kg, do not overload use.
- The maximum load bearing capacity of the rear of the stroller is 0.5kg, and it is not allowed to be used.
- Age : 0-36 months.


PRODUCT DETAILS

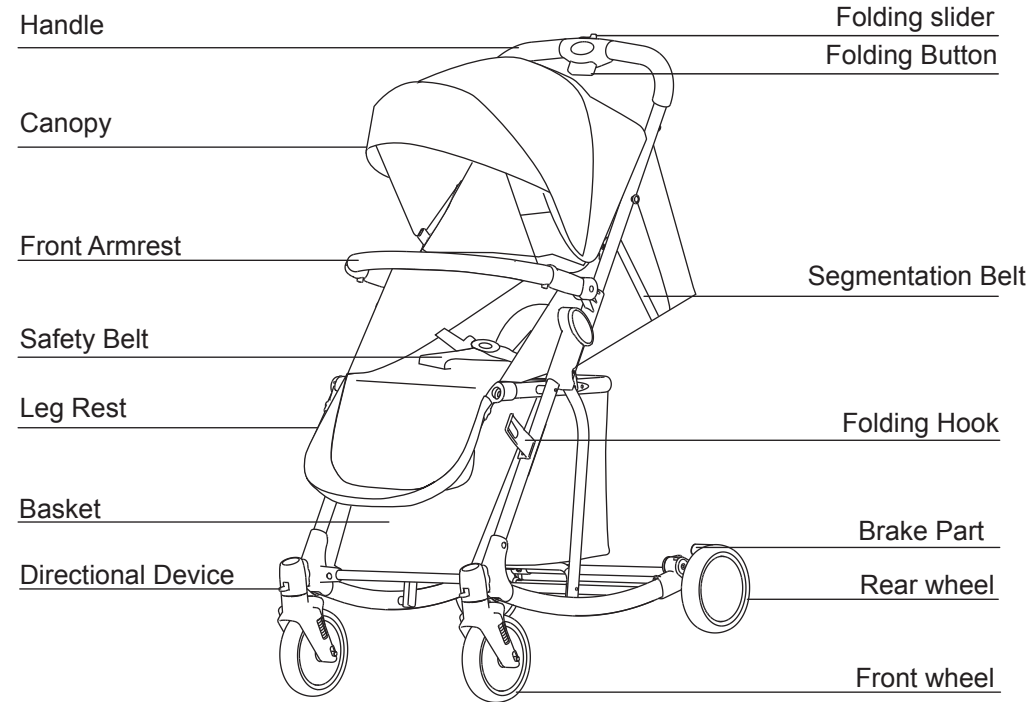


Open and Install

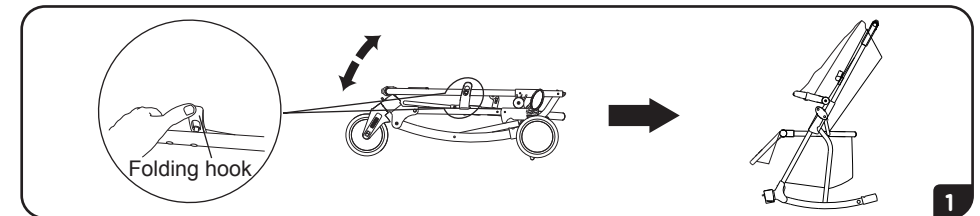


1. Open: Loosen folding hook, hold handle, open the frame reversibly. A "click" means the frame is well opened. Must make sure the frame is well opened before using the stroller.

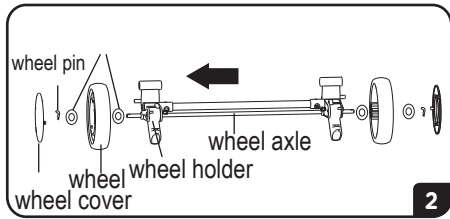


2. Install rear wheel assembly: install wheel axle through wheel holder, cushion, wheel, cushion like arrow, then install wheel pin and wheel cover. Then repeat for the other wheel.

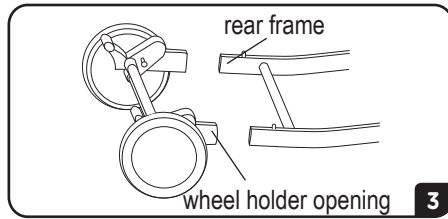


3. Install rear wheel : insert rear wheel axle to the front wheel seat , hear the "click" sound that is installed in place. Press down the button and pull out the front wheel to remove the front wheel.

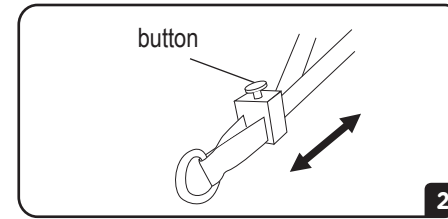


2. Backrest adjustment: Tighten the belt with one hand and press the button. Slight back & forth to adjust the back rest at will.

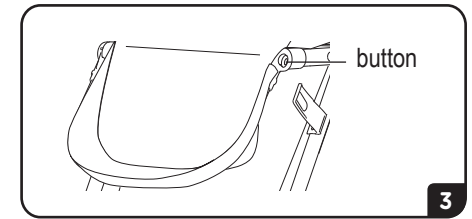


3. Leg rest adjustment: Press leg rest adjustment button as shown in picture 3 , pull or push to adjust.

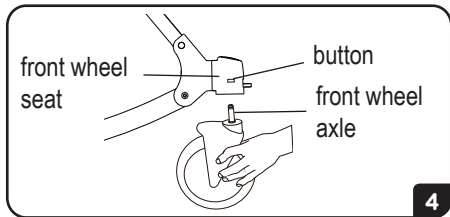

4. Install front wheel : insert the front wheel axle to the front wheel seat , hear the "click" sound that is installed in place. Press down the button and pull out the front wheel to remove the front wheel.

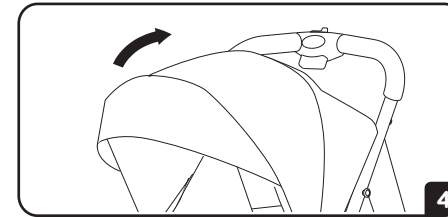


4. Canopy: Push sun canopy as picture 4 (forward & backward) to keep it open & closed.

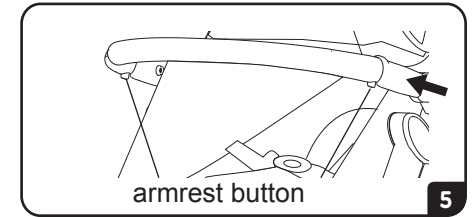


5. Front Armrest: Press armrest button and pull as picture 5 to disassemble it.


USE

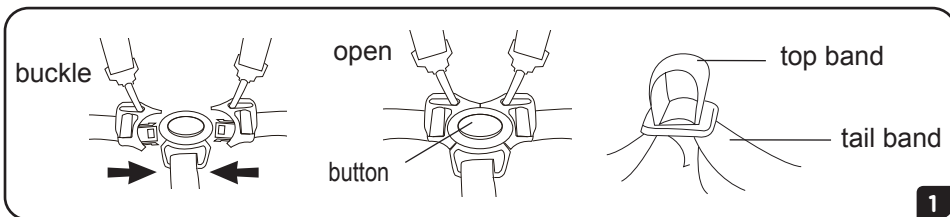


1. Safety belt and cross belt use:
 Buckle: insert the plug into the socket in the direction of the arrow until it is locked.
 Open: press the button to open.
 Shorten: Lengthen the top band, and then lengthen the tail band, locking.
 Length: stretch the top band, and then shorten the tail band, locking.

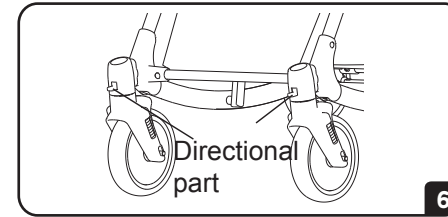

6. Front Wheel Orientation : Press the front wheel directional parts, the front wheel can be oriented. Lift up the directional parts, the stroller can be free direction.

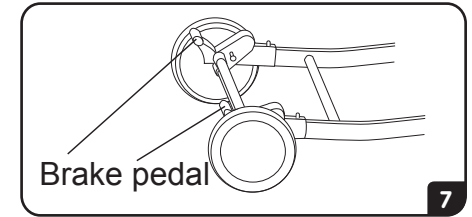

7. Brake: Step down brake pedal to stop stroller .Brake pedal must be pushed down position when stroller is not in use.

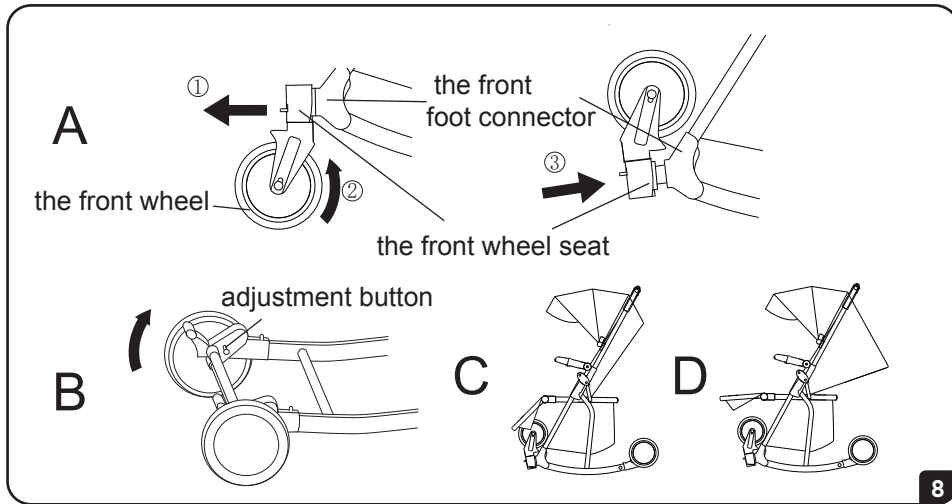

8. Cradle and Rocking chair:

A) Turn round the front wheel: one hand holding the front foot connector, the other hand along the direction of the arrow, pull out the front seat, and then turned up 180 degrees until you hear the "click" sound.


The same operation on the other side.

B.) Repeat the same process with rear wheels as well.

C.) Rocking chair: Turn over the front wheel, the backrest to the most upscale, put down the foot board, that is, a rocking chair.

D.) Cradle: turn the front wheel, the back to the lowest level, lift foot board, that is a cradle

Folding

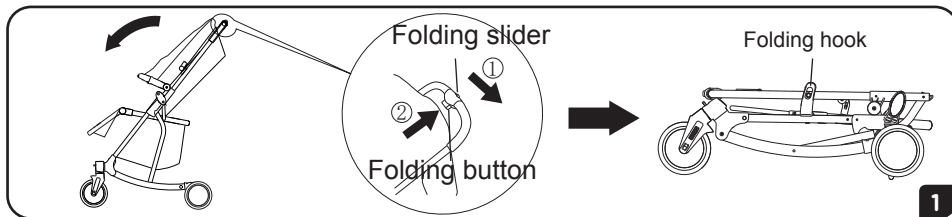

1. Folding: First fold the top of the canopy, then push the folding slide to the left and hold the folding handle, and push the push forward until the folding hook slides into the lock hook