

Step 19:

Attach the rear basket using screws.



Step 20:

Your Tiny Toes R20 Ace tricycle is now ready for use!



Safety Instructions

- Always have an adult assemble the tricycle.
- Never leave your child unattended while using the tricycle.
- Allow only one child on the tricycle at a time.
- Do not exceed the recommended weight limit.
- Keep away from stairs, steep slopes, uneven surfaces, or thresholds to avoid tipping or falls.
- Keep the tricycle away from fire, heaters, or direct flames.
- Do not use the tricycle on roads, driveways, or any area with moving vehicles.
- Do not let other children push the tricycle while your child is seated.
- Always exercise caution to prevent accidents or collisions.
- Regularly check and tighten all screws and parts to ensure safety and proper functioning.

Marketed By: **R FOR RABBIT BABY PRODUCTS PVT. LTD.**

307, 3rd Floor, Pinnacle Business Park, Corporate Road, Prahladnagar, Ahmedabad, Gujarat, India-380015

For Customer Complaints/Feedback:

+91-734-834-0934 / 734-834-9340

www.rforrabbit.com

customercare@rforrabbit.com

Find us on:

Manufactured by: **FUNRIDE TOY LLP**


Plot No.8/4A, Site-IV, Sahibabad, Industrial Area, Ghaziabad,-201010

For Installation Video

Scan QR or Visit YouTube



Search for Product Details



Tricycle

*Picture shown is for illustrative purposes only. Actual product may vary from image.

TINY TOES R20 ACE

Smart Plug N Play Baby Tricycle

Installation & User Manual

IMPORTANT - KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.
FAILURE TO OBSERVE THESE INSTRUCTIONS MAY AFFECT THE SAFETY OF YOUR CHILD!



Components



Installation Steps

Step 1:

Place the washer and lock washer on the circular part of rod to secure it.



Step 3:

Position the mudguard over the front wheel with pedals.



Step 5:

Install the front basket by securing it in place.




Step 2:

Attach the rear wheels to each side of the main frame body.



Step 4:

Fix the front wheel with pedals to the frame body.

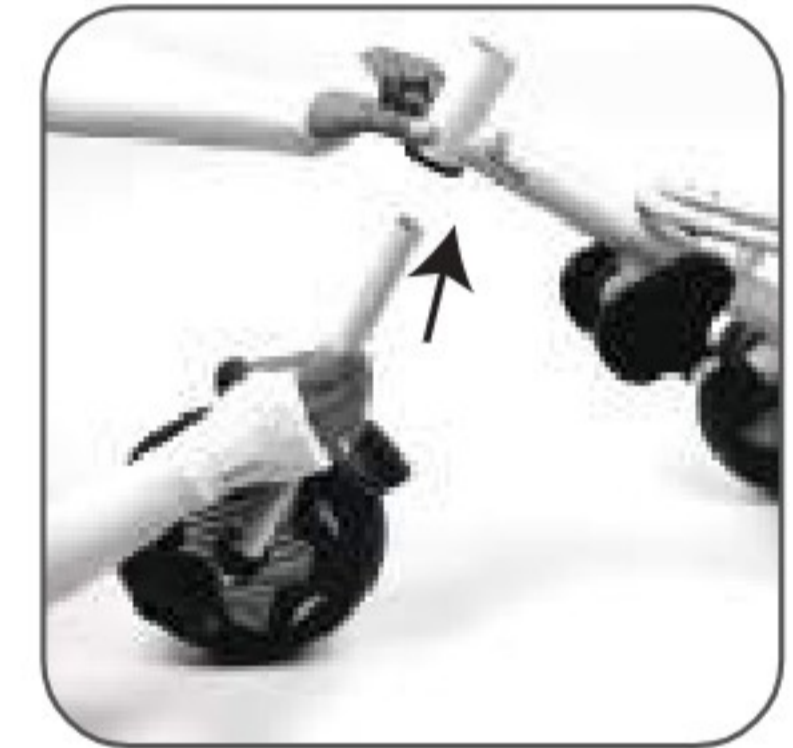

Step 6:

Press the push pin and slide the handlebar into position until it clicks.



Step 7:
Tighten the handlebar screw to secure it.



Step 8:
Press push pin and unfold the leg stand as demonstrated.



Step 9:
Unscrew and remove the circular rubber part from the rear axle.



Step 10:
Remove the screw on top of the rear axle.



Step 11:
Insert the rear axle under the frame body. Press the push pin until it clicks.



Step 12:
Slide the rubber part back on the rear axle and tighten with the screw.



Step 13:
Place the cap with screw on top of the rear axle.



Step 14:
Attach the hook end of the steering rod into the hole as shown in image.



Step 15:
Secure the rear axle with screw as shown in image.



Step 16:
Position the seat on the frame and secure it using screws.



Step 17:
Attach the parental handle to the rear axle until it clicks and tighten the screw.



Step 18:
Fix the bottle holder onto the parental handle.

