

Note

- ◇ The tricycle is for children of age from 1.5 to 5 years.
- ◇ Assembly of the product is to be done by adult
- ◇ Keep your child away from the running roads when he/she is riding the tricycle
- ◇ Always attend your child while he/she uses it
- ◇ Don't let your child ride the tricycle on or near stairs or irregular areas.
- ◇ Weight capacity of tricycle is up to 25kg
- ◇ Do not use tricycle on slope drive
- ◇ Do not allow any other child to push the tricycle when a child is riding it.
- ◇ Keep the packaging plastic bags away from the reach of child as it can cause suffocation hazard.

Maintenance

- ◇ Clean the tricycle with soft cloth instead of auto wax or water to avoid rusting
- ◇ Keep away from fire and high temperature areas
- ◇ Please ensure all screws are properly fastened periodically.

Designed & Marketed By: **R FOR RABBIT BABY PRODUCTS PVT. LTD.**

Add: 708, 7th Floor, Pinnacle Business Park,

Corporate Road, Prahlad Nagar, Ahmedabad, Gujarat 380015


C: +91-79-410-57595 | W: www.rforrabbit.com

E: customercare@rforrabbit.com

Manufactured by: PlayWay Systems

Add. 4/B, Maninagar, Nr. Ashok Garden, Mavdi Plot, Rajkot, Gujarat-360007


Scan & Search "Tiny Toes T10 Ace" for Installation

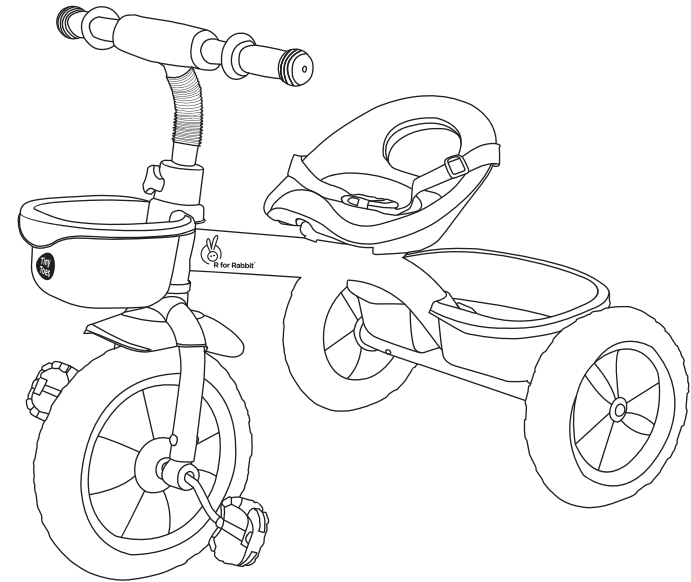

*Picture shown is for illustrative purpose only.
Actual product may vary from image.

TINY TOES T10 ACE

Smart Plug N Play Tricycle



Installation & User Manual

IMPORTANT – KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.
FAILURE TO OBSERVE THESE INSTRUCTIONS MAY AFFECT THE SAFETY OF YOUR CHILD!

Steps of Installation



1. Unbox the Tricycle



2. Install the mudguard into the front body of tricycle as shown in ref pic



3. Insert the main body into front ones post fitting with round black vicer given.




4. Install the front basket as shown in pic



5. Install the front steering part with the help of push pin given on both the sides (Front and Back Side)




6. Tighten up the fork screw given as shown in picture



7. Unscrew the screws given on seat part to install the seat



8. Fit the Seat as shown in picture and post that tighten the same with screws.



9. For installing rear wheels, firstly fit the black vicer given into the small rod




10. The same needs to be then inserted from front side of the wheel




11. After inserting a small rod from front side, put the second vicer into the same as shown in picture



12. Cover the front part of wheel with the cap given along with the product



13. Fix the wheel with the help of pushing a red button given in bottom. The same procedure needs to be repeated for second wheel as well.



14. Post installing both the wheels unscrew the fork screw given on back side to install the rear basket.



15. Fix the rear basket and tighten the same with the help of fork screw



16. Install the bell with the help of screw



17. Ready to Fun